

全套提升和移动设备的相关产品
在质量、安全性及操作简便性方面有着无与伦比的优点

Related products for the whole set of lifting and moving equipment
In the quality, safety and ease of operation has an unparalleled advantage


经过多年来的不懈努力，今天，川崎已经成为重型负载安全提升和移动行业的代名词中。在全球范围内，凯力产品解决了大量的提升和移动问题。我们精通的专业知识和数十年的经验，得以在保证使用者和负载量最大安全性的基础上，针对每一客户，提供经济可行的选择方案。

我们设计和生产的提升和移动设备紧扣市场，可以满足各种不同场合的需要。即使在狭窄空间场合也可进行高精度的提升和移动设备。并可按客户要求定制更高吨位的提升级和移动设备。

After years of unremitting efforts, today, Kawasaki has become synonymous with heavy load and improve safety in mobile industry. In the world Range, Kaili products to solve a large number of lifting and moving problem. Our expertise and decades of experience have been guaranteed.

Based on the maximum security of the user and the load, to provide a feasible solution for each customer.

We design and manufacture of lifting and moving equipment can meet the needs of the market closely, different occasions. Even in the narrow space field High precision and mobile devices can also be improved. And can be customized according to customer requirements more high tonnage upgrade and mobile devices.

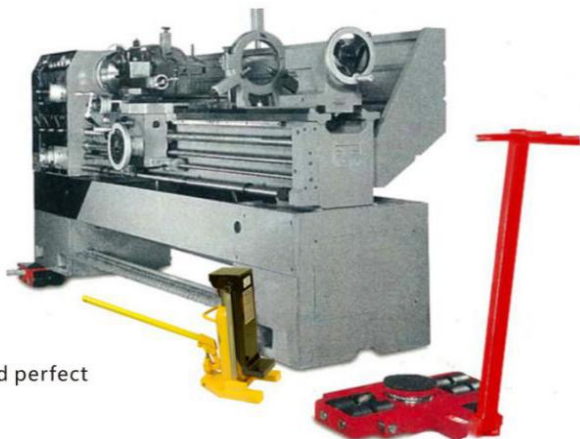

服务/检测标志/设计
Service / detection logo / design

所有川崎产品均提供迅捷的维护和完善的备件服务。
All products are Kawasaki provide quick and perfect service spare parts maintenance.

所有川崎产品均能持续达到较高的质量标准，每件产品出货前都要经过一系列的检测，然后提供一分检测报告并贴上标签。

All Kawasaki products can continue to meet the high standards of quality, and each product before shipment to through a series of tests, and then provide a test report and label.

针对不同需要提升和移动的场所，设计部门都能为您量身定做一套简单可行的解决方案。

According to different needs of lifting and moving the occasions, design department can be tailor-made for you a set of simple solutions.

● 常规产品质量保证为12个月

Conventional product quality assurance for 12 months


川崎®
KAWASAKI

MHC系列油压爪式千斤顶
MHC series oil pressure claw type jack



机械调整水平、重量物移动工程·造船、桥梁、土木工事、钢架支柱工程等用途！


Mechanical adjustment level, weight shift
Engineering, shipbuilding, bridges, civil engineering
The steel pillar fortifications, engineering application!

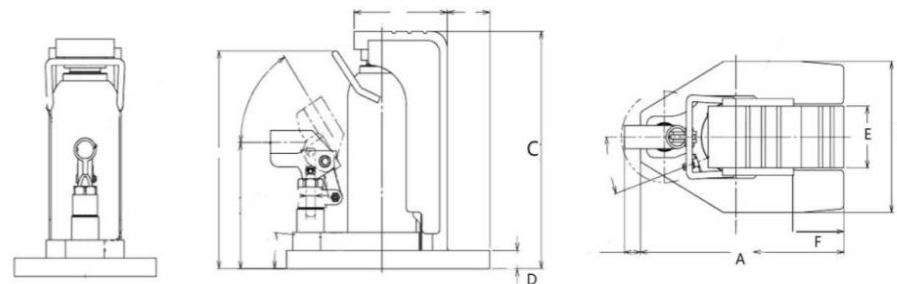

型 号 MODEL		MHC-2.5RS	MHC-5RS	MHC-10RS	MHC-15RS	MHC-25RS
尺寸(长×宽×高) (mm) Dimensions (length x width x height)		210×140×232	260×200×283	295×220×322	305×255×350	340×285×350
爪(最低位置)(mm) Claw (lowest position)		20	20	25	30	50
爪 宽 E (mm) Claw width E		65	100	115	130	130
爪 长 F (mm) Claw length F		45	50	55	60	65
扬 高 (mm) High Yang		115	148	158	158	150
额定载荷(T) Rated load	顶 部 Top	5	10	20	30	50
	爪 部 Pawl	2.5	5	10	15	25
重 量 (KG) Weight		11	24	36	55	75

注：本公司保留对产品技术参数更改权，如有变更恕不另行通知，请于下单的来电详询。
Note: the company reserves the right to change the product technical parameters, if there is no change without notice, please call us for details.

可按客户要求定制各类非标千斤顶
Can be customized according to customer requirements of various non-standard jack

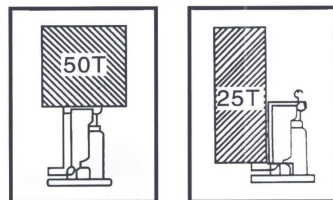

分离式超薄千斤顶
Split type ultra-thin jack

专用超低或超高等
爪式千斤顶
Special ultra low or ultra high claw type jack

MHC系列油压爪式千斤顶简介



广泛适用于机械设备、桥梁建筑、铁路轨道等方面的安装和维修；交通运输的重物装卸；汽车拖拉机修理等方面。产品选用进口千斤顶，采用优质钢材经焊接热处理后，具有结构简单、使用方便、坚固耐用、质量稳定上乘、安全可靠；起顶两用、便于低位操作，是一种用途广泛的起重工具。



MHC series oil pressure claw type Introduction to Jack

Widely used in mechanical equipment, bridge construction, railway track and other aspects of the installation and maintenance; transportation of heavy loading and unloading; car tractor repair and other aspects. Imported jack, the use of high quality steel after welding heat treatment, with a simple structure, easy to use, durable, quality and stability, safe and reliable; the top of the dual-use, easy to operate, is a widely used tool.

使用示意图
Using the schematic diagram




CRA系列小坦克（附转盘滚珠）

型号 MODEL	CRA-4	CRA-6	CRA-8	CRA-9	CRA-12	CRA-16	CRA-20	CRA-25
尺寸(长×宽×高) (MM) Dimensions (length × width × height)	280×215×110	380×215×110	475×220×110	380×300×110	475×300×110	490×390×110	590×390×110	590×480×110
最大核载量 (T) Maximum nuclear load	6	8	12	15	18	24	30	36
正常核载量 (T) Normal nuclear load	4	6	8	9	12	16	20	25
轮子数量 (N) Number of wheels	4	6	8	9	12	16	20	25
产品重量 (KG) Product weight	13.5	20	27.5	28.5	37	52	68	82
轮子材质 (M) Wheel material	PU轮	PU轮	PU轮	PU轮	PU轮	PU轮	PU轮	PU轮

可根据不同环境使用不同轮子如钢轮、尼龙轮、防碎轮等，根据客户要求定制超大吨位搬运小坦克。

According to different environments using different wheels, steel wheels, nylon wheels, anti broken wheels, etc., according to customer requirements for large tonnage handling small tanks.

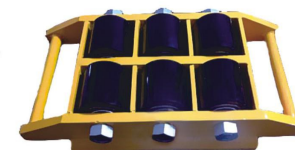



操作手柄杆
手柄杆长度为1050mm
Operating lever
Handle length of 1050mm

CRO系列搬运小坦克(无转盘及滚珠) CRO series of small tanks (no turntable and ball)

型号 MODEL	CRO-4	CRO-6	CRO-8	CRO-9	CRO-12	CRO-16	CRO-20	CRO-25
尺寸(长×宽×高)(MM) Dimensions (length x width x height)	280×215×97	380×215×97	475×220×100	380×330×100	475×300×100	490×390×100	590×390×100	590×480×100
最大核载量 (T) Maximum nuclear load	6	8	12	15	18	24	30	36
正常核载量 (T) Normal nuclear load	4	6	8	9	12	16	20	25
轮子数量 (N) Number of wheels	4	6	8	9	12	16	20	25
产品重量 (KG) Product weight	12.5	18	26.5	27.5	36	49	59	79
轮子材质 (M) Wheel material	PU轮	PU轮	PU轮	PU轮	PU轮	PU轮	PU轮	PU轮

可根据不同环境使用不同轮子:如钢轮、尼龙轮、防碎轮等, 根据客户要求定制超大吨位搬运小坦克。

According to different environments using different wheels, steel wheels, nylon wheels, anti broken wheels, etc., according to customer requirements for large tonnage handling small tanks.

WQ系列180度转向小坦克 WQ series 180 degrees turn to small tanks



产品特长:
本产品重量轻、载重量大, 转身灵活、操作安全方便等优点, 可根据客户要求定制超大吨位。
Product features:
This product is light weight, large load, turning around, easy to operate, safe and convenient. Advantages, can be customized according to customer requirements.

型号 MODEL	WQ-6T	WQ-8T	WQ-12T	WQ-18T	WQ-24T
尺寸(长×宽×高)(MM) Dimensions (length x width x height)	330×220×110	380×220×110	470×220×110	480×320×110	680×410×110
最大核载量 (T) Maximum nuclear load	6	8	12	18	24
正常核载量 (T) Normal nuclear load	4	6	8	12	16
轮子数量 (N) Number of wheels	4	6	8	11	16
产品重量 (KG) Product weight	13.5	19	27	56	82
轮子材质 (M) Wheel material	PU轮	PU轮	PU轮	PU轮	PU轮
轮子尺寸 (MM) Wheel size	80×70	80×70	80×70	80×70	80×70


使用示意图 Using the schematic diagram



WA系列重型180度转向小坦克 WA series heavy duty 180 degree turn to small tank

产品特长:
本产品为重型小坦克、载重量大, 转身灵活、操作安全方便等优点, 可根据客户要求定制超大吨位。
Product features:
This product is a heavy tank, with a large load, and turned to flexible, safe operation Convenient and other advantages, can be customized according to customer requirements.

型号 MODEL	WA-6T	WA-8T	WA-12T	WA-18T	WA-24T	WA-30T
尺寸(长×宽×高)(MM) Dimensions (length x width x height)	370×265×110	450×265×110	540×285×110	540×285×110	480×320×110	680×410×110
最大核载量 (T) Maximum nuclear load	6	8	12	18	24	30
正常核载量 (T) Normal nuclear load	4	6	8	12	18	24
轮子数量 (N) Number of wheels	4	6	8	8	11	16
产品重量 (KG) Product weight	21	27	36	54	68	100
轮子材质 (M) Wheel material	PU轮	PU轮	PU轮	钢轮双	钢轮双	钢轮双
轮子尺寸 (MM) Wheel size	80×70	80×70	80×70	80×70	80×70	80×70

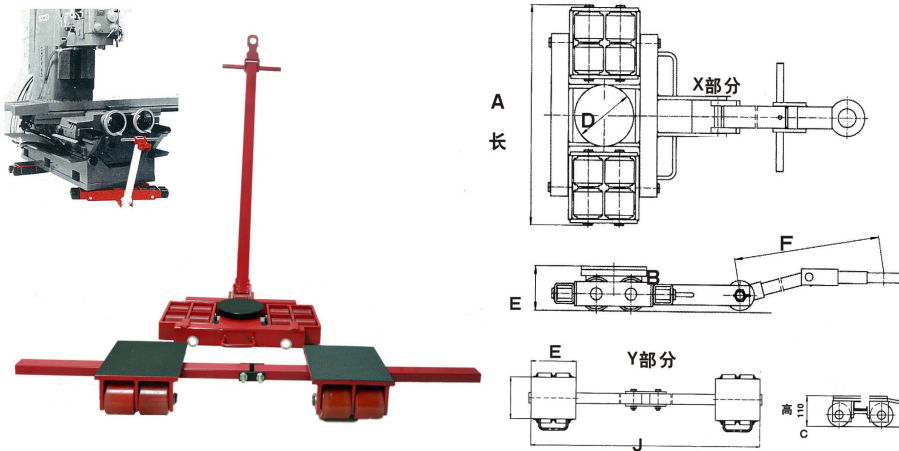

型 号 Model	轮子尺寸 (mm) Wheel size	轮子数量 (只) Number of wheels	接触面尺寸 (mm)D Contact surface size	手柄长度调节长度 (mm) Length of handle	外形尺寸 (mm) Dimension (长×宽×高)	额定载重力 (T) Nominal load	净重 (kg) Net weight
X4+Y4	X4 Φ80×70	4	D:Φ160	F: 800	230×230×110	4	13
	Y4 Φ80×70	4	E:180×140	J:300-1000	180×140×110	4	15
X8+Y8	X8 Φ80×70	8	D:Φ160	F: 1400	560×420×110	8	46
	Y8 Φ80×70	8	E:200×160	J:400-1500	200×200×110	8	28
X12+Y12	X12 Φ80×70	12	D:Φ160	F: 1400	750×450×110	12	72
	Y12 Φ80×70	12	E:220×180	J:400-1500	260×200×110	12	36
X16+Y16	X16 Φ80×70	16	D:Φ200	F: 1300	936×500×110	16	88
	Y16 Φ80×70	16	E:240×180	J:400-1500	310×230×110	16	46
X18+Y18	X18 Φ80×70	18	D:Φ200	F: 1400	780×550×110	18	96
	Y18 Φ80×70	18	E:280×200	J:400-1500	320×220×110	18	52
X24+Y24	X24 Φ80×70	24	D:Φ200	F: 1400	1000×580×120	24	118
	Y24 Φ80×70	24	E:350×220	J:400-1500	340×320×120	24	70
X32+Y32	X32 Φ80×70	32	D:Φ200	F: 1400	1080×720×140	32	175
	Y32 Φ80×70	32	E:440×220	J:400-1500	430×320×140	32	118

- ※本系列产品X型为前置移动工具，具有自动调节平衡功能，在高低不平场地也能走平稳。
并设计有手柄操作杆，简便，转向灵活。
- ※Y型为后置移动，可根据移动物的尺寸调节宽度。
- ※本系列产品轮子采用特殊材料制作，耐压、耐磨，不易损坏工作场地等。
- ※This series of products for the X type front moving tool, with automatic adjustment of balance function, in the uneven ground can go smoothly. And the design of the handle lever, simple and flexible.
- ※Type Y is a rear movement, which can be adjusted according to the size of the animal.
- ※This series of products are made of special materials, pressure, wear, not easy to damage the work site, etc..



使用示意图
Using the schematic diagram

AK+BK系列重型搬运小坦克

AK+BK series heavy handling small tanks

本系列产品为AB重型组合式搬运小坦克、具有超强稳定性、持久、耐用、灵活方便。
This series of products for the AB heavy combined type small tanks, with strong stability, lasting, durable, flexible and convenient.

Bk型部分：可根据移动物的尺寸调节宽度
Part Bk: adjustable width of the size of the animal.

型 号 Model	轮子尺寸 (mm) Wheel size	轮子数量 (只) Number of wheels	接触面尺寸 (mm)D Contact surface size	手柄长度调节长度 (mm) Length of handle	外形尺寸 (mm) Dimension (长×宽×高)	额定载重力 (T) Nominal load	净重 (kg) Net weight	
AK8+BK8	Ak8	115×60	8	160	1400	540×480×140	16	60
	BK8	115×60	8	300×250	1500	300×250×140	16	62
AK16+BK16	Ak16	115×60	16	200	1400	820×480×140	32	100
	BK16	115×60	16	350×350	1500	350×350×140	32	105
AK24+BK24	Ak24	115×60	24	200	1400	820×615×140	48	135
	BK24	115×60	24	350×510	1500	350×510×140	48	150

产品特点：

本产品带手遥装置，可以节省数倍人力，在没有外部动力牵引重物的情况下或者搬运人员太少、力量不够的情况下使用本产品可以移动重物。

Product specialty:

This product with a remote device, can save several times in the absence of external power by human. In the case of a heavy load, or carrying a person too little, the strength is not enough. This product can move heavy loads.




CRD系列手摇搬运小坦克

CRO series of manual handling of small tanks

型号 MODEL	CRD-6	CRD-8	CRD-12	CRD-18
尺寸 (长×宽×高) (MM) Dimension (Length×Width×Height)	360×280×110	455×280×110	550×280×110	550×280×110
最大核载量 (T) Maximum nuclear load	6	8	12	18
正常核载量 (T) Normal nuclear load	4	6	8	12
轮子数量 (N) Number of wheels	4	6	8	8
产品重量 (KG) Product weight	22	28	36	50
轮子材质 (M) Wheel material	尼龙轮	尼龙轮	尼龙轮	钢轮

GKS-PERFEKT 载重搬运车
TL6 TL12

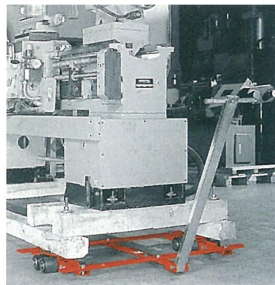


KL系列特别适用于需要四点接触的负载,例如接触面是框架结构的机器。

KL series is especially suitable for the need of four points contact load, such as the contact surface is the box machine with a structure.



特制摩擦轴承高强度滚轮安装在自由导向框内,可按用户需要定制钢滚轮。
Special friction bearing high strength roller is installed in the free guide frame, Can be customized according to user needs of steel roller.

型号 Model number	KL8	KL16	KL64
吨位(ton) Tonnage	8	16	64
工作高度(mm) Working height (mm)	110	110	140
滚轮尺寸 (mm) Roller size (mm)	80×80	80×80	115×60
滚轮数量 Roller number	8	16	32
胶垫接触面积 (mm) Pad contact area (mm)	160	160	200
连接杆长度 (mm) Connecting rod length (mm)	550-1150	660-1000	1800-2100
操作杆长度 (mm) Operating lever length (mm)	950	1080	1620
操作杆可调角度 Operating lever adjustable angle	±50	±40	±40
重量 KG Weight KG	45	105	258



KL 64 可与 BK 系列配套使用

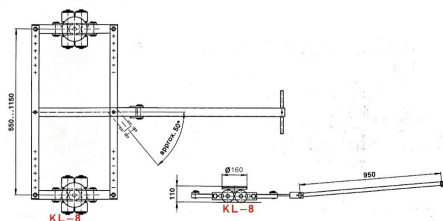

可与Y系列搬运车配套使用

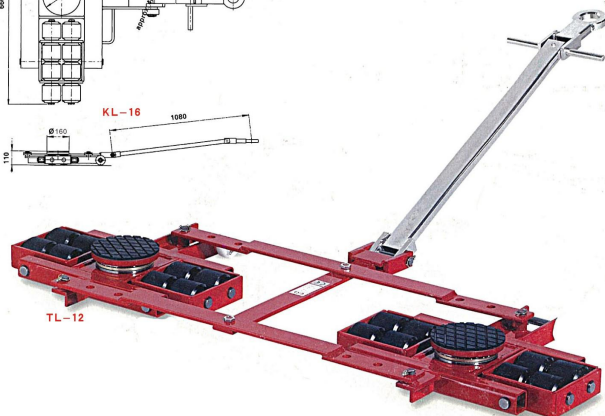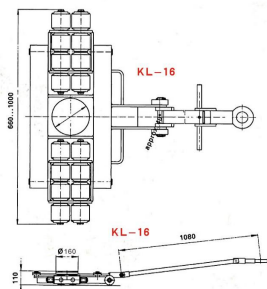

万向小坦克 CRP系列
Rotating trolleys CRP series

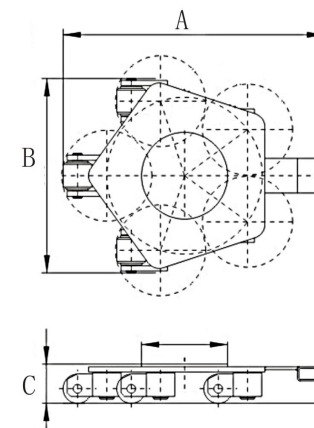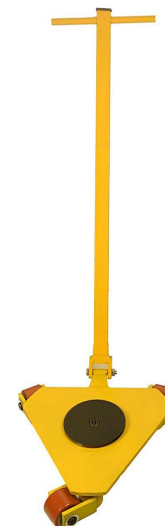

型号 MODEL	CRP-3	CRP-4	CRP-5	CRP-10	CRP-15
尺寸(长×宽×高) (MM) Dimensions (length × width × height)	500×480×115	580×520×115	630×550×115	650×580×113	720×620×113
最大核载量 (T) Maximum nuclear load	3	4	5	10	15
正常核载量 (T) Normal nuclear load	2	3	4	8	12
轮子数量 (N) Number of wheels	3	4	5	4	5
产品重量 (KG) Product weight	22.5	31	40	67	88
轮子材质 (M) Wheel material	PU轮	PU轮	PU轮	钢轮	钢轮

※多台万向小坦克可同时使用。如果需要,可用连接杆将其两两连接使用。

※万向小坦克也可装上操纵手柄使用。

※选购件: 带拉环的操纵手柄: 连接杆(标准长度1050) 其它长度可定制。

※Multiple universal small tanks can be used at the same time. If needed Connecting the use of the connecting rod with the connecting rod two two.

※Universal small tank can also be installed on the use of control handle.

※Optional: handle with tab: connecting rod (standard Length 1050) other length can be customized.

可根据客户要求定制各类万向手动小坦克


Can be customized according to customer requirements of various types of universal manual small tanks



CRW系列升降360度搬运小坦克

本产品可升降并原地360度旋转，进退自如，可多台使用。在搬运过程中可将油管拔出，方便使用。

This product can lift and place a 360 degree rotation, jintuiziru, Multiple use. In the process of handling can be pulled out, easy to use.

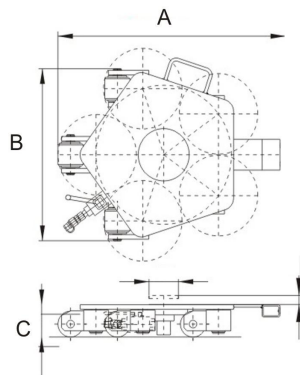

型号 CRW Model number CRW	CRW-3	CRW-5	CRW-8	CRW-12
尺寸(长×宽×高) (MM) Dimensions (length × width × height)	520×520×125	660×570×128	700×600×140	780×700×140
正常核载量 (T) Normal nuclear load	3T	5T	8T	12T
起升高度 (MM) Lifting height (MM)	30mm	30mm	30mm	30mm
管子长度 (MM) Pipe length (MM)	1500mm	1500mm	1500mm	1500mm
重量 (KG) Weight (KG)	38	45	65	85
轮子材质 (M) Wheel material	PU轮	PU轮	钢轮	钢轮



CRF越障碍式搬运小坦克

CRF more obstacles to carry small tanks

型号 MODEL	CRF-6	CRF-8	CRF-12
尺寸(长×宽×高) (MM) Dimensions (length × width × height)	410×280×120	410×390×120	650×280×120
最大核载量 (T) Maximum nuclear load	6	8	12
正常核载量 (T) Normal nuclear load	4	6	8
过障碍能力 (MM) This product has been met with obstacles (MM)	20	20	20
产品重量 (KG) Product weight	28	35	52
轮子材质 (M) Wheel material	PU轮	PU轮	PU轮

产品特点:

本产品轮子遇到障碍物能自动超过,坑凹能自动下降,轮子高低自动调节,能克服普通搬运车弱点,更轻松方便!

This product is a product of special features:

The products of the product can be automatically exceeded, the pit can be self-move down, the level of automatic adjustment, can overcome the ordinary truck Weakness, more relaxed and convenient!

可根据不同环境使用不同轮子如钢轮、尼龙轮、防碎轮等，根据客户要求定制超大吨位搬运小坦克。

According to different environments using different wheels, steel wheels, nylon wheels, anti broken wheels, etc., according to customer requirements for large tonnage handling small tanks.

使用示意图

Using the schematic diagram




规格 Gauge	最大承载TON Maximum load bearing TON	长 MM (A) Long MM (A)	宽 MM (B) Wide MM (B)	高 MM (C) High MM (C)	总重量KG (D) Total weight KG (D)	侧板距离 MM The distance MM
CRM8	8	370	230	90	17	152
CRM10	10	400	230	90	20	152
CRM15	15	415	240	110	28	160
CRM20	20	450	240	110	30	160
CRM25	25	490	240	110	35	160
CRM30	30	530	300	140	60	205
CRM40	40	580	300	145	70	205
CRM50	50	625	300	150	80	230
CRM60	60	660	340	165	105	230
CRM80	80	710	340	170	120	250
CRM100	100	760	340	175	135	250
CRM120	120	870	365	190	180	250
CRM150	150	930	365	195	200	278
CRM200	200	920	393	220	230	278
CRM250	250	990	393	225	260	288
CRM300	300	1060	393	230	290	288
CRM350	350	1190	423	255	400	300
CRM400	400	1270	423	260	440	300
CRM450	450	1355	423	265	490	320
CRM500	500	1440	423	270	530	320

※特点：一般适用于槽钢、钢板等直行使用，具有超强稳定、持久耐用。工字钢、槽钢等直行牵引上使用。可根据客户要求和尺寸定制各类履带式搬运坦克车。


※注意：直行小坦克，请勿转向。

※ Features: generally applicable to steel and steel plate, straight, strong, stable and durable. Steel I-beam, straight line traction on the use of. Can be customized according to customer requirements and size of various types of crawler trucks.

※ Note: do not turn on the small tank.

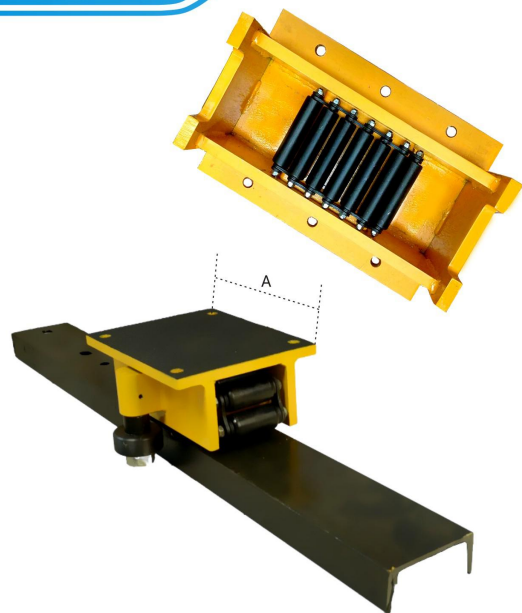

产品示意图
Product sketch map

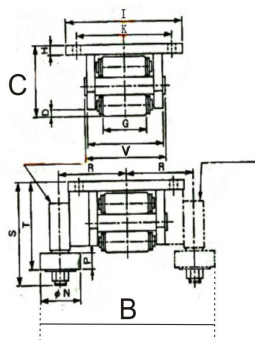

规格 Gauge	最大承载TON Maximum load bearing TON	长MM Long MM (A)	宽MM Wide MM (B)	高MM High MM (C)	总重量KG Total weight KG	侧板距离MM The distance MM(V)
CRB-10	10	250	312	90	20	152
CRB-20	20	330	320	90	30	160
CRB-40	40	420	365	145	70	205
CRB-60	60	450	390	165	95	230
CRB-80	80	480	410	170	110	250
CRB-100	100	540	410	170	125	250
CRB-150	150	700	438	195	180	278
CRB-200	200	700	438	195	215	278
CRB-300	300	840	458	230	270	298

本产品可双向使用，一般适用于方钢、工字钢等，用于承重规道。


如：地面使用把导向轮拆下即可！

注：严禁转向使用。

This product can be used in two-way, generally applicable to steel, I-beam, bearing for orbit.

Such as: ground use to remove the guide wheel can be!

Note: it is strictly forbidden to use.

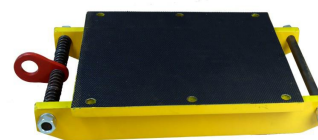

CRK重型履带式搬运坦克车
CRK heavy tracked vehicle


规格 Gauge	最大承载TON Maximum load bearing TON	长MM Long MM (A)	宽MM Wide MM (B)	高MM High MM (C)	总重量KG Total weight KG (D)
CRK20	20	400	360	90	33
CRK40	40	450	360	90	50
CRK60	60	530	485	140	100
CRK100	100	660	550	165	170
CRK150	150	710	560	170	190
CRK200	200	760	560	175	205
CRK300	300	930	616	195	350
CRK400	400	930	616	195	390

本产品适用于平面、钢板等无规道搬运工具，具有超强稳定性、持久耐用、安全等特点。

This product is suitable for plane, steel, and other non - road transport, with strong stability, durable, safe and so on.

履带式小坦克 WRS系列

Roller transport trolleys WRS series



- ★ 移动平稳，连接面呈齿条形、结构低矮。
- ★ 所有的额定载荷的计算，都是基于在能承受住滚柱链压力钢质表面的使用工况。
- ★ 禁止在沥青和混凝土地面上使用，若需在此工况下使用，建议先垫一块厚度至少为10毫米的钢板。
- ★ 行进速度不得超过5米/分钟。

- ★ Move smoothly, connecting bar structure, tooth surface is low.
- ★ All the calculation of rated load, are based on the roller chain can withstand the pressureWorking condition of the steel surface.
- ★ It is forbidden to use on asphalt and concrete ground, A plate with a thickness of at least 10 mm is recommended.
- ★ Travel speed shall not exceed 5 m / minute.

型号 Model	A(MM)	B(MM)	C(MM)	D(MM)	E(MM)	F(MM)	滚柱数量 Number of rollers	额定载荷(t) Rated load (T)	重量(KG) Weight (KG)
WRS10	270	152	92	24	85	10	14	10	13
WRS20	330	160	92	24	135	10	18	15	15
WRS30	350	205	112	29	120	10	18	30	35
WRS50	450	230	135	39	140	10	18	80	65

▼下图所示为：ER-20套件



简单安全地 移动重负载

套件(见表格)包括所有进行各种应用的必要部件。2、根连杆ELB-1.2携带手柄ERH-1 (长880mm)以及一个EMB-1金属盒。

另一选择为长手柄ERH-2(1295mm), 仅适用于60和80吨。

Kit (see table) including all of the various applications Necessary component. 2, root connecting rod ELB-1.2 carrying handle ERH-1 (long 880mm) as well as a EMB-1 gold Box.
Another option for long handle ERH-2 (1295mm), Applies only to 60 and 80 tons.

液压起道机



为了能置放载重滚轮小车, 需先将负载顶起。这可方便容易地靠Enerpac液压起道机来实现。

Hydraulic starting machine
In order to put load dolly, You need to load the top of the load. This can be easy to rely on Enerpac hydraulic Road machine to achieve.

- ★ 结构坚固, 经久耐用;
- ★ 低高度结构更加稳定;
- ★ 低滚动阻力方便搬运;
- ★ 可加置负载平板转台用于转向。

- ★ Sturdy structure, durable;
- ★ Low height structure more stable;
- ★ Low rolling resistance, easy to move;
- ★ Can be added to the load of flat plate for steering.


▼ 载重滚轮小车可以分别订购或配套订购




套件 工作能力 Suite Working ability	套件 型号 Suite Model	载重滚轮小车 Truck wheel	旋转台面 Rotary table	平板 Flat plate	重量含手柄 与金属盒 (KG) Weight with handle Metal box
20(178)	ERS-20	ER-10	ES-10	ELP-10	49
30(267)	ERS-30	ER-15	ES-15	ELP-15	55
60(533)	ERS-60	ER-30	ES-30	ELP-30	75

套件设计为能让两个滚轮小车来承担全重, 以保证在不平整地板上的安全


◀ 用载重滚轮小车移动重型设备, 机器选用Enerpac液压起道机提升




ER-1, ER-10, ER-15, ER-30




ER-60, ER-80




ES-1, ES-10, ES-15, ES-30



ES-60, ES-80



ELP-10, ELP-15, ELP-30



ELP-60, ELP-80

ELP
ER
ES
系列



最大搬运工作能力:
80ton

	滚轮车载 重能力 Roller Heavy capacity	型号 MODEL	尺寸 (mm)						滚轮车的 着地轮数 Roller coaster Number of rounds	轮子数量 Number of wheels	重量 (KG) Weight (KG)
			A	B	C	D	E	F			
载重 滚轮小车	15(133)	ER-15	270	152	92	24	85	10	5	14	7.3
	30(267)	ER-30	350	205	112	29	120	10	7	18	13.0
	60(533)	ER-60	450	230	135	39	140	10	7	18	31.9
	80(711)	ER-100	650	240	140	39	140	10	7	18	60.9
转台	15(133)	ES-15	250	90	38	160					8
	30(267)	ES-30	330	135	48	200					16
	60(533)	ES-60	430	160	61	230					26
	80(711)	ES-80	630	160	61	240					30
平板	15(133)	ELP-15	180	152	38	130					5
	30(267)	ELP-30	260	205	48	200					12
	60(533)	ELP-60	330	230	61	260					30
	80(711)	ELP-80	350	240	61	280					35

产品特长：

本产品为组合转向，可在极小空间内自由转向。具有超强的稳定性，安全可靠。

Product specialty:
This product is a combination of steering, can be in a very small free turn in space. Super strong stability, safe and reliable.

X系列双向搬运小坦克



X series two way moving small tank

型号 MODEL	尺寸(长×宽×高) (MM) Dimensions (length × width × height)	最大核载量 (T) Maximum nuclear load	正常核载量 (T) Normal nuclear load	轮子数量 (N) Number of wheels	产品重量 (KG) Product weight	轮子材质 (M) Wheel material	轮子尺寸 Wheel size
X1-4	280×395×110	6	4	4	22	PU轮	80×70
X2-8	440×395×110	8	6	8	42	PU轮	80×70
X3-12	560×395×110	12	8	8	51	PU轮	80×96



CRE系列管道移动车

CRE series pipe moving vehicle

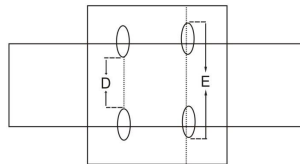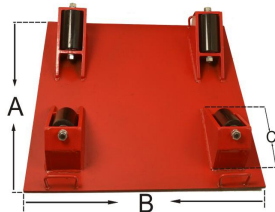


产品特长：

CRE适合各类地下管道、圆柱体电缆等在外没有动力牵引和人员不足的情况下，可使用本产品可以移动重物，物体长的话可以多台一起使用，操作方便、快捷，节省资源。可根据客户需要定制各类大小移动车。

Product specialty:
CRE suitable for all kinds of underground pipe, cylinder cable, etc. in the external no power traction and people in case of insufficient staff, we can use this product to move heavy objects, the object can be long. More than a table to use, easy to operate, fast, save resources. Can be customized according to customer needs. All kinds of mobile car.

型号 MODEL	尺寸(长×宽×高) (MM) Dimensions (length × width × height)	正常核载量 (T) Normal nuclear load	轮子数量 (N) Number of wheels	产品重量 (KG) Product weight	轮子材质 (M) Wheel material	最小距离 D Minimum distance	最大距离 E Maximum distance
CRE-1	600×600×175	8	4	65	钢轮	100	600
CRE-2	800×800×175	12	4	85	钢轮	200	800
CRE-3	1000×1000×175	18	6	110	钢轮	300	1000



CH-2.5T



CH-1.5T




CH系列搬运小坦克

CH series small tanks

型号 MODEL	CH-1.5T	CH-2.5T
尺寸(长×宽×高) (MM) Dimensions (length × width × height)	195×220×55	230×100×110
最大核载量 (T) Maximum nuclear load	1.5	2.5
轮子数量 (N) Number of wheels	8	2
产品重量 (KG) Product weight	4	6
轮子材质 (M) Wheel material	钢轮	PU轮

KL系列超大吨位搬运小坦克

KL SERIES OF LARGE TONNAGE CARRYING SMALL TANKS

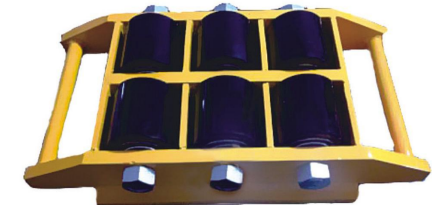


型号 MODEL	KL-40	KL-60	KL-80	KL-100	KL-150	KL-150
尺寸(长×宽×高) (MM) Dimensions (length × width × height)	520×330×125	590×330×145	640×330×125	730×330×145	590×460×125	730×460×145
正常核载量 (T) Normal nuclear load (T)	40	60	80	100	150	200
轮子数量 (N) Number of wheels	6	6	8	8	12	12
产品重量 (KG) Product weight	80	105	126	139	170	208
轮子材质 (M) Wheel material	合金钢	合金钢	合金钢	合金钢	合金钢	合金钢
轮子尺寸 Wheel size	100×100	120×100	100×100	120×100	100×100	120×100

货柜钻板夹/PALLET CLAMP





适用于各类木质、货柜、托盘、木材、等方便灵活。

Applies to all kinds of wood, container, support plate, wood, and other convenient and flexible.

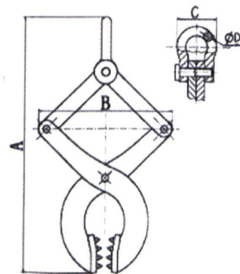

型号 Model	VK-1	VK-2	VK-3
额定载荷 Rated load	KG 1000	2000	3000
适用工字钢宽度 For beam width	MM 30-100	30-180	30-200
尺寸(mm) Dimensions (mm)	A	250-410	360-510
	B	230-290	340-390
	C	75	90
	D	16	20
净重 Net weight	KG 6	9.5	14

撬棒 JO系列 Lever rod JO series

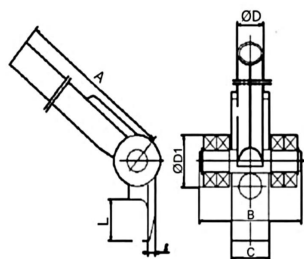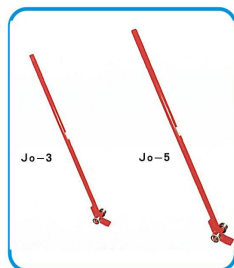

型号 Model	JO-3T	JO-5T
额定载荷 Rated load	t 3	5
尺寸(mm) Dimensions (mm)	A	1370
	B	160
	C	65
	D	34
	L	50
	D1	62
	1	10
净重 Net weight	KG 7	10

本产品是搬运小坦克及其他搬运工具的辅助工具,具有结构简单、操作方便等优点。

This product is the auxiliary tool for carrying small tanks and other transportation tools, and has the advantages of simple structure, convenient operation, etc..

搬运小坦克 WAS系列 Small tank WAS series



WAS20-NA WAS20-PA WAS20-N WAS40-N WAS60-P

型号 MODEL	WAS20-N	WAS20-NA	WAS40-N	WAS60-N
额定载荷(t) Rated load (T)	2	2	4	6
滚轮数量 Roller number	2	2	4	6
滚轮材质 Roller material	Nylon/PU	Nylon/PU	Nylon/PU	Nylon/PU
长×宽×高(mm) Long x width x height (mm)	115×270×110	115×270×110	230×270×110	345×270×110
净重(kg) Net weight (kg)	7.5	7.5	17	25


KLJX 轮子的革命

每一个KLJX凯力滚轮均由最新的高科技特殊材料聚酰胺/聚亚胺脂(polyamide/polyurethane)经高温高压聚合而成,并装有双滚珠轴承或滑动轴承,使之保证最大的稳定性转动性,并使您的地面免受损坏。

所有凯力滚轮出厂前均通过以下测试
——加载情况下抵抗力测试
——抗疲劳测试
——抗冲击测试

F/L18, F/L20载重搬运车装有最新滚轮,承重能力更佳。
F/L30以上载重搬运车装有带摩擦轴承的滚轮
所有型号产品都可按客户要求换成硫化滚轮或钢制滚轮。

Each KLJX Kaili rollers by the latest high-tech special materials polyamide / poly (polyimide/polyurethane) by high temperature and high pressure polymerization, and is equipped with double roller bearing or sliding bearing, so as to ensure maximum stability. Rotate and keep your ground from damage. All Kaili roller factory are all through the following tests: Resistance test under load, Anti-fatigue test, Impact resistance test, F/L20, F/L18 load carrying vehicle equipped with the latest roller, bearing. Heavy capacity is better. F/L30 above the load carrying vehicle equipped with friction bearing roller. All types of products can be replaced by customer's requirements for vulcanized or steel roller.

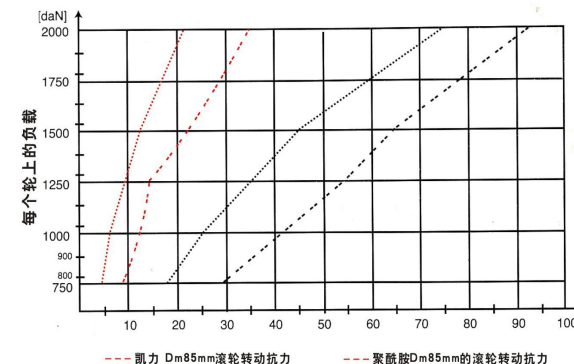

Rotation resistance of the roller of the Dm85mm Dm85mm

凯力特殊材料的滚轮在启动抗力和转动抗力上与聚酰胺滚轮的比较。

Kaili special materials in starting resistance and anti rotation wheel Comparison between force and polyamide roller.

各类搬运车轮、小坦克车轮等型号和配件齐全。

All kinds of transport wheels, small tanks and other models and accessories complete





高强度双向小坦克
可直行、转向等方便安全可靠

High strength two way small tank Can be straight, steering, and other convenient safe and reliable



K系列搬运工具

适用于宽度不够或者空间狭小的地方, 使用可根据工作环境更改各种轮子。

K series moving tools

Applicable to the width of the space is not enough or small, the use of the work environment to change a variety of wheels.



直行防滑搬运小坦克

Straight line of small tanks



超低搬运小坦克

Ultra low handling small tanks



重型高强度X系列搬运小坦克

Heavy and high strength X series carrying small tanks



WE系列双向转向搬运小坦克

WE series two-way steering handling small tanks



CA系列搬运小坦克适用于
各类圆钢、管道等圆柱体搬运小坦克


Ca series of small tanks used in All kinds of round steel pipe, cylinder handling of small tanks

根据各种不同工作环境物体提升和移动, 凯力为您量身定做简单易行的方案。

According to the different working environment of lifting and moving objects, Kaili tailored simple solution for you.



自走式搬运系统 WPTS 系列
power-transport-systems WPTS series
WPTS20、WPTS35

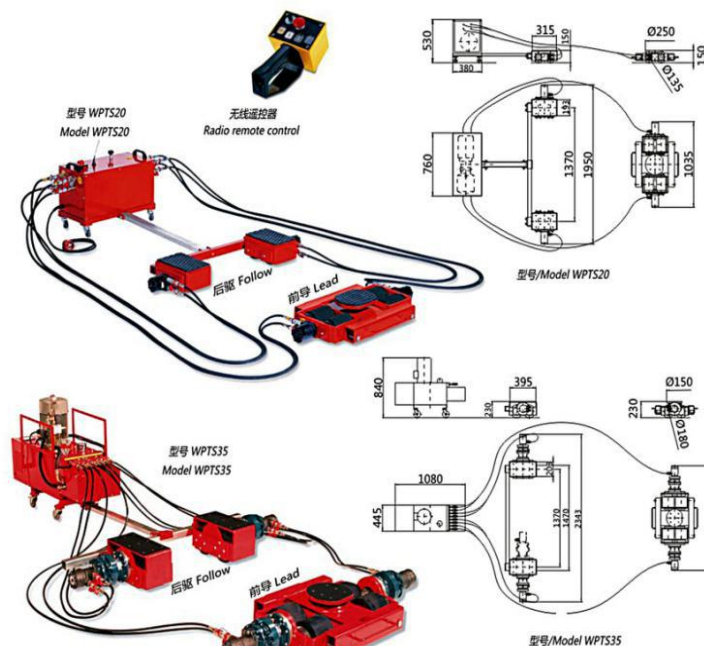

较小的转弯半径, 确保安全平衡地操作并旋转到任何想摆放的位置, 上下小斜坡也不会有问题。也可选择电池供电型。

The small turn radius ensure smooth and safe operation to any wanted location. Even small slopes or acclivities are not a problem for the WPES. Optional the WPES is deliverable battery-powered, too.

型 号 MODEL	WPTS20	WPTS35
承载能力(T) Carrying capacity	20	35
工作高度(mm) Working height	150	230
滚轮参数(mm) Roller parameter	Φ135×143	Φ180×143
滚轮数量 Roller number	8	8
承载面尺寸(mm) Bearing surface size	193×315Φ250	203×395Φ250
小坦克重量 后驱/前导(KG) Small tank weight after drive / Leader (KG)	104/133	198/255
液压总成重量(KG) Hydraulic total weight (KG)	94	167
液压总成外形尺寸(mm) Hydraulic assembly dimensions (mm)	760×380×530	1080×445×840

HANGZHOU APOLLO LIFTING EQUIPMENT CO.,LTD.

HANGZHOU KAWASAKI LIFTING EQUIPMENT CO.,LTD.

No.493 Linping road,Yuhang distric, Hangzhou, China

Mobile/WhatsApp/Wechat: +86 15158032530

Skype: judy85739094

Tel: +86-571-86210926

Fax: +86-571-86210929

E-mail:sales@apollohoist.com

<http://www.apollohoist.com/>

<https://hsygroup.en.alibaba.com/>