



杭州阿坡罗起重机械有限公司
APOLLO LIFTING EQUIPMENT CO.,LTD

K-HBSQ 型防爆手拉葫芦

K-HBSQ Type Explosion-proof Chain Hoist

※ 防爆手拉葫芦除可单独使用外，还可同电动葫芦，链条或电动小车装配在一起悬挂在建筑物的顶棚或起重机的梁上使用

※ 可配合防爆单轨小车实现在工字钢左右移动并提升重物的功能，防爆手拉葫芦的安装，拆卸都十分方便，安全，快捷

※ 防爆手拉葫芦以铝青铜，铍青铜作为毛坯，手拉葫芦外壳采用H62铜合金材料

※ 受力摩擦部位包括构成手拉葫芦的起重轮，手链轮，墙板，挂钩，齿轮齿轮轴采用铝青铜，铍青铜合金材料

※ 产品安全可靠，设计先进，链条摩擦不会引发火花发生爆炸等不良反应


·Explosion-proof hand chain block can be used alone and also can be used with electric block chain or electric trolley assembly together hanging on the roof of buildings or the crane beam.

·Also with the monorail trolley realizing the walking around when lifting a heavy weight functionThe installation and disassembly of explosion-proof hand chain block is very convenient safe and fast.

·Explosion-proof hand chain block with is produced with aluminum bronze .

·Beryllium bronze as a blank By force of friction parts including forming hand chain block up heavy wheel chain wheel wall panel shook gear shaft is made of aluminum bronze beryllium bronze alloy materials.

·The product is safe and reliable.The design is advanced When lifting the copper and iron do not spark.Therefore there is no explosion and other adverse reactions.

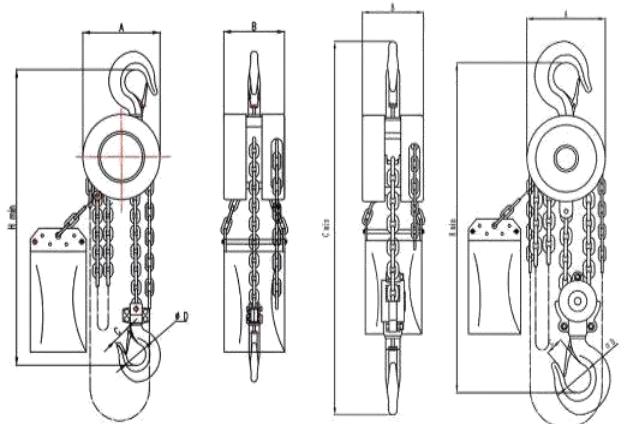

型号 Model		K-HBSQ0.5	K-HBSQ1	K-HBSQ2	K-HBSQ3	K-HBSQ5	K-HBSQ7.5	K-HBSQ10	K-HBSQ20
额定载荷 Capacity(t)		0.5	1	2	3	5	7.5	10	20
起重高度 Lifting height(m)		2.5	2.5	2.5	3	3	3	3	3
试验载荷 Test load(t)		0.75	1.5	3	4.5	7.5	11.2	12.5	25
链条行数 No. of load chain fall lines		1	1	2	2	2	3	4	5
尺寸 Dimensions(mm)	A	142	142	142	178	266	350	360	580
	B	130	130	130	150	170	170	170	170
	Hmin	300	326	440	600	650	880	900	1000
	D	30	43	50	63	65	72	77	106
净重 Net weight(kg)		12	13	16	26	3	66	83	180